




SOIL-LOK™

Penetrating Grout Sealer

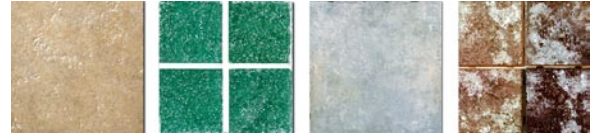

DESCRIPTION

Uniquely designed for ceramic tile grouting, this exceptional product repels dirt, oil and water; keeps grout looking bright. A water-based penetrating sealer that repels oil, dirt and moisture from grout. Detergent washable, this product will keep grout looking like new. Does not change the original color of grout. SOIL- LOK allows for vapor transmission to prolong grout life. Can be used indoors or outdoors. No hazardous fumes or obnoxious odors.

FEATURES / BENEFITS

- Safe, water-based formulation
- Allows vapor transmission
- Prevents staining from oils, dirt and hard water deposits

DIRECTIONS FOR USE

Test in an inconspicuous area for suitability prior to application. For new installations, sealer can be applied 48 hours after grouting. Grout joints must be clean, dry and free of existing sealers and coatings. Apply 1 to 2 coats with a soft bristle paint brush or sponge paint applicator. Using cotton or paper towels, remove any sealer remaining on the tile within 3 to 5 minutes of application. If 2 coats are applied, allow a minimum of 30 minutes drying time between coats.

Ready for surface traffic 2 hours after final coat. Sealed area should be kept dry for 12 hours. Achieves a full cure in 24 hours. Conduct a test to determine if surface is completely sealed after 2 hours by applying water droplets to the surface. If water is absorbed, apply an additional coat. Wait 2 hours and repeat the test. Coverage: Approx. 1000 lin. Feet per quart (304m).

SPECIFICATIONS

| | | | |
|--------------------------------|-------------------------------|------------------------------------------|-----------|
| Product type | Water-based aqueous solution | pH (concentrate) | 7.0 - 8.0 |
| Non-Flammable | Yes | Resistance to water-based stains | Excellent |
| Appearance | Translucent Straw-like liquid | Ease of application | Superior |
| VOC Compliant | Yes | UV Resistance | Yes |
| Odor | Mild | Vapor transmission through surface | Yes |
| Surface penetration | Rapid | Drying Time (minutes) | 30 |
| Specific Gravity (gr/cc) | 1.00 ± .02 | Safe on Grout | Yes |

SAFETY INFORMATION

CAUTION: MAY BE HARMFUL IF SWALLOWED. MAY CAUSE MINOR SKIN AND EYE IRRITATION. KEEP OUT OF REACH OF CHILDREN. Avoid contact with skin and eyes. Do not ingest.

For Eyes: Rinse thoroughly with water for at least fifteen minutes. If irritation persists seek medical attention. **For Skin:**

Flush skin thoroughly with water. If irritation persists seek medical attention. **If ingested:** Do not induce vomiting. Drink 2 glasses of water. Seek medical attention. Never give anything by mouth to an unconscious person.

FOR PROFESSIONAL USE ONLY

Warranty: Determining the suitability of this product for its intended purpose shall solely be the responsibility of the user. In the event of failure, the sole obligation of National Chemical Laboratories shall be to replace the product deemed defective. User assumes all risk and liability; neither manufacturer nor seller will be held liable for any injury or damage.



| HMIS HAZARD CODE | |
|------------------|---------------------|
| 1 | HEALTH |
| 0 | FLAMMABILITY |
| 0 | REACTIVITY |
| A | PERSONAL PROTECTION |



401 N. 10th Street • Philadelphia, PA 19123
1-800-NAT-CHEM • 215-922-1200 • FAX: 215-922-5517
www.nclonline.com • e-mail:info@nclonline.com